


KELVIN Clim **W407**

Cooling Capacity: 407 ~ 1610 kW

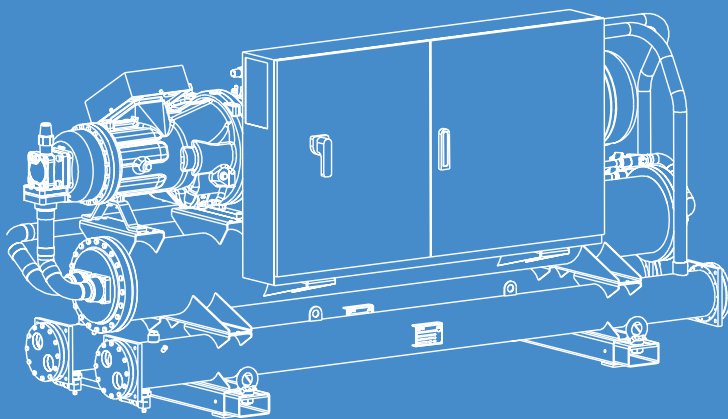

Water cooled liquid chillers in "A" class energy efficiency for indoor installation, equipped with twin screw compressors and shell and tube heat exchangers


KELVIN Clim W407

KELVIN CLIM W407 : Water cooled liquid chillers in "A" class energy efficiency for indoor installation, equipped with twin screw compressors and shell and tube heat exchangers

Cooling Capacity: 407 ~ 1610 kW



KELVIN AIR CONDITIONING



MAIN FEATURES

- Water cooled liquid chiller in A class energy efficiency.
- 14 models available, for a wide selection opportunity.
- Average step of 85kW.
- EER up to 5,14.
- ESEER up to 5,75.
- Twin-screw compressors.
- Double refrigerant circuit.
- R134a Refrigerant charge.
- Electronic expansion valve.
- Shell and tube heat exchangers.
- Suitable for indoor installation.

MAIN BENEFITS

- High EER and ESEER, A class energy efficiency.
- Availability of kit for the reduction of the noise.
- Availability of partial heat recovery system.
- Easily of maintenance.
- Eurovent Certification(pending)

INDOOR INSTALLATION

The machines are designed for indoor installation.

ELECTRONIC EXPANSION VALVE

The electronic expansion valves are synonymous of a higher energy efficiency and stability of the system.

A CLASS ENERGY EFFICIENCY

The best and most accurate components applied to the chillers.

WORKING LIMITS IN COOLING MODE

Evaporator chilled water outlet temperature: -11~15.5°C
 Condenser outlet water temperature: 21~49°C



MAIN COMPONENTS

FRAMEWORK

- Base and self supporting frame in steel plate with protective surfaces treatment in compliance with UNI ISO 9227/ASTMB117 and ISO 7253, and painted with epoxy powders.
- Colour: RAL 9005.

COMPRESSORS

- Twin screw semi-hermetic compressors with highly efficient screw profile and high peripheral speed, optimized for R134a refrigerant.
- Integrated discharge check valve.
- Flanged-on oil separator.
- Integrated overpressure valve.
- Replaceable cartridge type oil filter.
- Oil flow switch.
- Valves for oil filling and discharge.
- Sight glass.
- Electronic protection device that includes:
 - Electric motor thermal protection via internal winding temperature sensors.
 - Phase sequence electronic relay,
 - Sensor on refrigerant discharge for temperature monitoring,
- 2-pole 3-phase electric motor with Part-Winding starting for models 410 V2 / 460 V2 / 510 V2 / 540 V2 / 610 V2.
- 2-pole 3-phase electric motor with Star / Delta starting for all other machines.
- Capacity control, 50~100% for each compressor.
- Crankcase heater.
- Terminal box with IP54 enclosure class.
- Rubber supports.

EVAPORATOR

- Shell and tube evaporator optimized for R134a refrigerant.
- Tubes with a helical rifled internal surface.
- Intermediate baffles positioned to ensure optimum speed of the fluid and low pressure drops.
- Single circuit on water side and independent circuits, one for each compressor, on refrigerant side.
- Shell, header, tube sheets, made of carbon steel, tubes in Cu.
- Anticondensate insulation made of polyurethane.
- Temperature sensors on water inlet and outlet.
- Hydraulic connection with grooved end complete with flexible joint and adapter pipe for solder connection.

CONDENSER

One condenser for each refrigerant circuit:

- Shell and tube condenser optimized for R134a refrigerant.
- Shell, header, tube sheets made of carbon steel, tubes in Cu.
- Hydraulic connection with grooved end complete with flexible joint and adapter pipe for solder connection.

REFRIGERANT CIRCUIT

Components for each refrigerant circuit:

- Electronic expansion valve that allows high performance and system efficiency thanks to a timely and accurate response to changes in temperature and pressure.
- Sight glass.
- Filter dryer on liquid line.
- Service valves on liquid line.
- Service valves on gas discharge.
- Safety valve on low pressure side.
- Safety valve on high pressure side.
- Pressure transducers with indication, control and protection functions, on low and high refrigerant pressure and oil pressure.
- High pressure safety switch with manual reset.
- Refrigerant circuit with copper tubing with anticondensate insulation of the suction line.
- Plastic capillary hoses for pressure sensors connection.
- R134a refrigerant charge.

ELECTRICAL PANEL

In accordance with EN60204-1 norms, suitable for indoor installation, complete with:

- Main switch with door lock safety.
- Fuses for each compressors.
- Contactors for each compressors (2 contactors for Part-Winding start system – 3 contactors for Star / Delta start system).
- Compressor Part-Winding start system for model 410 V2 / 460 V2 / 510 V2 / 540 V2 / 610 V2
- Compressor Star / Delta start system for all other machines.
- Transformer for auxiliary circuit and microprocessor supply.
- Panel with machine controls.
- Power supply: 400/3/50.

CONTROL SYSTEM

- MPCOM microprocessor system with graphic display for control and monitor of operating and alarms status. The system includes:
 - Voltage free contact for remote general alarm.
 - Main components hour-meter.
 - Integrated "Data logger" function for the recording of events and alarms.
 - Nonvolatile "Flash" memory for data storage.
 - Menu with protection password.

OPTIONAL ACCESSORIES

KELVIN Clim W407	410 V2	460 V2	510 V2	540 V2	610 V2	700 V2	790 V2	940 V2	1050 V2	1110 V2	1140 V2	1310 V2	1460 V2	1610 V2
171 - Rubber antivibration holders (kit)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
118 - Kit brine A (for glycol solution production up to °6-C)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
119 - Kit brine B (for glycol solution production up to °12-C)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
450 - Desuperheater	●	●	●	●	●	●	●	●	●	●	●	●	●	●
731 - Safety water flow switch	●	●	●	●	●	●	●	●	●	●	●	●	●	●
650 - Compressor thermal relay	●	●	●	●	●	●	●	●	●	●	●	●	●	●
605 - Compr. power factor capacitor - 0,9	●	●	●	●	●	●	●	●	●	●	●	●	●	●
550 - Stop valve on compressor suction line	●	●	●	●	●	●	●	●	●	●	●	●	●	●
780 - Noise absorption box	●	●	●	●	●	●	●	●	●	●	●	●	●	●
83 - Compressor operation indicator	●	●	●	●	●	●	●	●	●	●	●	●	●	●
85 - Demand limit	●	●	●	●	●	●	●	●	●	●	●	●	●	●
88 - Analog set point compensation	●	●	●	●	●	●	●	●	●	●	●	●	●	●
960 - Free contact enable plant pump	●	●	●	●	●	●	●	●	●	●	●	●	●	●
963 - Free contact enable source pump	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1003 - Analogic flowmeter	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1005 - Power supply analyzer	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1009 - Multimeter kit	●	●	●	●	●	●	●	●	●	●	●	●	●	●
919 - Clock card	●	●	●	●	●	●	●	●	●	●	●	●	●	●
923 - KELVIN-Com MBUS/JBUS Serial board	●	●	●	●	●	●	●	●	●	●	●	●	●	●
926 - LON Serial board	●	●	●	●	●	●	●	●	●	●	●	●	●	●
931 - BACnet Ethernet - SNMP - TCP/IP Serial board	●	●	●	●	●	●	●	●	●	●	●	●	●	●
932 - BACnet MS/TP Serial board	●	●	●	●	●	●	●	●	●	●	●	●	●	●
942 - Serial card for GSM Modem	●	●	●	●	●	●	●	●	●	●	●	●	●	●
943 - Data Logger	●	●	●	●	●	●	●	●	●	●	●	●	●	●
962 - Kit modem GSM	●	●	●	●	●	●	●	●	●	●	●	●	●	●
957 - Plantwatch without modem	●	●	●	●	●	●	●	●	●	●	●	●	●	●
930 - Remote graphic terminal kit	●	●	●	●	●	●	●	●	●	●	●	●	●	●
889 - Master plant SEQUENCER	●	●	●	●	●	●	●	●	●	●	●	●	●	●
KELVIN CLOUD PLATFORM	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● available accessory; - not available accessory

TECHNICAL DATA KELVIN Clim W407

KELVIN Clim W407		410 V2	460 V2	510 V2	540 V2	610 V2	700 V2	790 V2	940 V2
Cooling capacity (1)	kW	407	457	507	539	608	702	791	934
Unit power input	kW	80,6	90,1	100,0	106,9	119,4	136,6	156,0	184,2
Evaporator water flow rate	m³/h	69,8	78,5	86,9	92,6	104,0	121,0	136,0	160,0
Evaporator pressure drop	kPa	7	15	15	18	21	16	13	19
Condenser water flow rate	m³/h	84,2	94,6	105,0	112,0	126,0	145,0	163,0	193,0
Condenser pressure drop	kPa	10	13	16	23	22	21	25	19
Compressors	twin-screw	twin-screw	twin-screw	twin-screw	twin-screw	twin-screw	twin-screw	twin-screw	twin-screw
Quantity	n.	2	2	2	2	2	2	2	2
Capacity control	%	25 ... 100%	25 ... 100%	25 ... 100%	25 ... 100%	25 ... 100%	25 ... 100%	25 ... 100%	25 ... 100%
Refrigerant		R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Total refrigerant charge (optional excluded)	kg	77,8	77,8	185,5	185,5	185,5	185,5	170,6	163,1
Gas circuits	n.	2	2	2	2	2	2	2	2
Power supply	V/Ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
Max operating current (MOC)	A	167,2	195,0	222,2	243,6	283,4	310,2	362,2	406,0
Max unit operating current (FLA)	A	205,8	262,5	281,4	336,0	386,4	371,7	415,8	594,3
Unit starting current (LRA)	A	345,6	395,5	484,1	526,8	575,7	589,1	711,1	639,0
EER (1)	kW/kW	5,05	5,07	5,07	5,04	5,09	5,14	5,07	5,07
ESEER		5,67	5,65	5,62	5,75	5,60	5,73	5,69	5,67
Sound power level [Lw] (2)	dB(A)	91,8	91,8	91,8	96,8	96,8	97,6	100,6	100,6
Average sound pressure level [Lpm] (3)	dB(A)	74,0	74,0	74,0	79,0	79,0	79,0	82,0	82,0
Net weight	kg	3237	3268	3498	3590	3720	3967	4071	4835
Hydraulic connections									
Evaporator IN/OUT - OD (4)	Ø mm	168,3	168,3	168,3	168,3	168,3	219,1	219,1	219,1
Condenser IN/OUT - ISO 1	/228n x Ø	3	"3	"3	"3	"3	"3	"3	"3"
Condenser IN/OUT - OD (4)	Ø mm	-	-	-	-	-	-	-	-
OPTIONAL									
Partial heat recovery (5)									
Heating capacity	kW	52,9	59,5	65,9	70,1	79,0	91,3	103,0	121,0
Compressor soundproof box									
Sound power level [Lw] (2)	dB(A)	88,8	88,8	88,8	93,8	93,8	94,6	97,6	97,6
Average sound pressure level [Lpm] (3)	dB(A)	71,0	71,0	71,0	76,0	76,0	76,0	79,0	79,0


1. Referred to chilled water temperature 12/7°C – 0% glycol solution; water temperature to the condenser 30/35°C – 0% glycol solution.
2. Sound power level [Lw] according to ISO EN 9614 - 2.
3. Average sound pressure level [Lpm] 1 m far according to ISO EN 3744.
4. Hydraulic connection with grooved end complete with fl exible joint and adapter pipe for solder connection.
5. Referred to chilled water temperature 12/7°C – 0% glycol solution; water temperature to the condenser 30/35°C – 0% glycol solution; water temperature heat recovery 40/45°C – 0% glycol solution. Fouling factor of the exchangers 0,043 m²K/kW.

TECHNICAL DATA KELVIN Clim W407

KELVIN Clim W407		1050 V2	1110 V2	1140 V2	1310 V2	1460 V2	1610 V2	
STANDARD	Cooling capacity (1)	kW	1044	1108	1142	1308	1457	1610
	Unit power input	kW	206,3	216,8	223,5	256,0	286,2	316,9
	Evaporator water flow rate	m ³ /h	179,0	190,0	196,0	224,0	250,0	276,0
	Evaporator pressure drop	kPa	25	27	22	28	35	43
	Condenser water flow rate	m ³ /h	216,0	229,0	236,0	270,0	301,0	332,0
	Condenser pressure drop	kPa	21	25	23	19	19	22
	Compressors		twin-screw	twin-screw	twin-screw	twin-screw	twin-screw	twin-screw
	Quantity	n.	2	2	2	2	2	2
	Capacity control	%	%100 ... 25	%100 ... 25	%100 ... 25	%100 ... 25	%100 ... 25	%100 ... 25
	Refrigerant		R134a	R134a	R134a	R134a	R134a	R134a
	Total refrigerant charge (optional excluded)	kg	155,5	155,5	144,5	215,6	210,6	206,3
	Gas circuits	n.	2	2	2	2	2	2
	Power supply	V/Ph/Hz	50/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/400
	Max operating current (MOC)	A	456,0	456,0	501,8	581,0	600,0	662,0
	Max unit operating current (FLA)	A	594,3	594,3	661,5	747,6	793,8	863,1
	Unit starting current (LRA)	A	664,0	664,0	715,9	876,5	950,0	1136,0
	EER (1)	kW/kW	5,06	5,11	5,11	5,11	5,09	5,08
	ESEER		5,61	5,64	5,65	5,66	5,61	5,54
	Sound power level [Lw] (2)	dB(A)	101,2	101,2	101,2	103,6	103,6	103,6
	Average sound pressure level [Lpm] (3)	dB(A)	82,0	82,0	82,0	84,0	84,0	84,0
Net weight	kg	4949	5031	5549	6407	6537	6814	
Hydraulic connections								
Evaporator IN/OUT - OD (4)	Ø mm	219,1	219,1	219,1	273,0	273,0	273,0	
Condenser IN/OUT - ISO 1	/228n x Ø	3	"3"	-	-	-	-	
Condenser IN/OUT - OD (4)	Ø mm	114,3	114,3	114,3	139,7-	-	-	
OPTIONAL	Partial heat recovery (5)							
	Heating capacity	kW	136,0	144,0	148,0	170,0	189,0	209,0
	Compressor soundproof box							
	Sound power level [Lw] (2)	dB(A)	98,2	98,2	98,2	100,6	100,6	100,6
Average sound pressure level [Lpm] (3)	dB(A)	79,0	79,0	79,0	81,0	81,0	81,0	

1. Referred to chilled water temperature 12/7°C – 0% glycol solution; water temperature to the condenser 30/35°C – 0% glycol solution.
2. Sound power level [Lw] according to ISO EN 9614 - 2.
3. Average sound pressure level [Lpm] 1m far according to ISO EN 3744.
4. Hydraulic connection with grooved end complete with fl exible joint and adapter pipe for solder connection.
5. Referred to chilled water temperature 12/7°C – 0% glycol solution; water temperature to the condenser 30/35°C – 0% glycol solution; water temperature heat recovery 40/45°C – 0% glycol solution. Fouling factor of the exchangers 0,043 m²K/kW.

KELVIN Clim W407	a	b	c
410 V2	3359	975	1498
460 V2	3359	975	1498
510 V2	3349	1013	1618
540 V2	3349	1013	1618
610 V2	3435	1007	1740
700 V2	3514	1060	1780
790 V2	3894	1210	1888
940 V2	3894	1210	1888
1050 V2	3894	1210	1888
1110 V2	3932	1218	1890
1140 V2	3874	1287	1975
1310 V2	4273	1284	2084
1460 V2	4273	1284	2084
1610 V2	4352	1284	2108

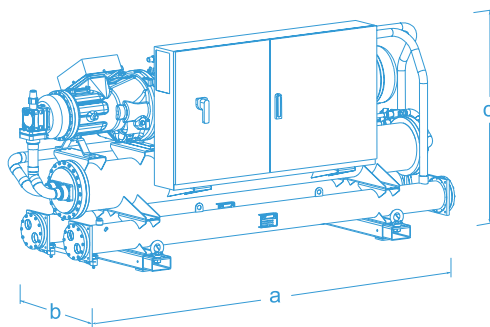

• Note

● Note

